Multimedia Digital Display Products



www.vrvinfoled.com

Honour Of VRV INFO LED PVT. LTD.

Reckoned as a pioneering and technology-driven manufacturer and exporter, VRV since 2008 now known as VRV info LED Pvt Ltd.2017, provides leading advertising products and engineering solutions. Operating internationally, we have expertise in design and product on of Floor standing, Wall mount, Double side hanging, Floor standing KIOSK, LED display and more. Available in various sizes, Our displays, and screen



provide easy and convenient user interactivly through various accessibility options in the form of audio or video. We are a one-stop-shop for all projects, whether big or small, VRV info LED Pvt. Ltd., which is capable of manufacturing bespoke signages and screens for any environment. Our handpicked team professionals help us excel in every project by offering end-to-end services. This is done in various stages which starts from auditing and analyzing prior to designing and product on until installation of products.





Ultra Stretch/Bar Type Display is available in a variety of sizes, configurations, and brightness options making them a perfect multipurpose solution for industrial and commercial advertising, especially in areas with high track and restricted, a typical-shape space. Bar Type Display is utilized in retail, advertising, public transportation, commercial buildings, quick service restaurants, and other applications. These digital signage, when placed at merchandising shelves with integrated media players, are the easiest way to keep your store on the modern edge.



Bar Type Screens (Stretched Screens) - No. 549

	Display Size (inch)	19	21	24	28	37				
	Resolution	1920*360	1920*132	1920*360	1920*360	1920*540				
	Active Display Area HxV	476.64 x 89.37 mm	529.41 x 36.39 mm	597.88 x 112.10 mm	699.84 x 131.22 mm	899.71 x 253.04 mm				
	Aspect Ratio	Bar Screen								
	Brightness (cd/ m2)	250 nits	300 nits	300 nits	700 nits	700 nits				
Panel	Display Mode	Normally Black, IPS								
Pai	Contrast Ratio (Type)	1200:1 4000:1								
	Viewing Angle		89/89/89(L/R/U/D)							
	Colour	16.7M								
	Response Time (G-to-G)	6.5 ms								
	Display Colours	10bit Dithering - 10.07 Billion								
	Operation Hour			24/7						
	Туре			Internal						
Power	Power Supply	AC 100 - 240 V~ (+/- 10%)								
Ро	Sleep Mode	Less than 0.5W								
	Off Mode	Less than 0.5W								
CS :h	Protection Glass	Not available								
Mech. Specs	Stand Type			Wallmount						
	Processor		Rockchip (Quad RK3188 core cortex	A9,1.6G					
	RAM	1 GB DDR								
٤	Internal Memory	8 GB DDR								
System	Operating System	Android 4.4								
Sy	WiFi	802.11b/g/n								
	Ethernet	10M/100M ethernet								
	Bluetooth			Bluetooth 4.0						
	USB Host x 3			USB 2.0						
rface	USB OTG			USB OTG						
erfa	SD Card Slot			SD/MMC Card						
Inter	Earphone			3.5 mm earpohone						
	RJ 45	Ethernet								
lia /s	Video Format		MPEG-1,MPEG	G-2,MPEG-4,H.263,H.264,\	/C1,RV etc.					
Media Plays	Photo			JPEG						
	VESA			Wallmounting						
S	Language			Multi-language						
Others	Working Tempera- ture	0 - 40 degree								
	Power Consump- tion	24W								
. :	Adapter			Adapter 12V, 3A						
Access.	User Manual		Yes							



Digital Menu Board













NIPS








Digital menu boards can help your business in many ways; from altering consumer behaviours at the point - of - sale, enhancing and promoting your brand, scheduling different menus and pro-motions during peak periods, instant pricing changes, managing your signage from a central location, to increasing cross-selling and up-selling opportunities. Digital Menu Board can be easily customized as your digital signage to reflect your brand and diner's tastes. Use the digital menu board on the outside of your restaurant to draw diners in, or place signage inside to help you to advertise, upsell, or entertain guests.



	Display Size (inch)	43	49	55				
	Resolution		1920*1080					
	Active Display Area HxV (mm)	941.2*532.4	1070*601	1209.6*680.4				
	Aspect Ratio		16:09					
	Brightness (cd/m2)		350 nits					
Je!	Display Mode	Normally Black, IPS OPENCELL						
Panel	Contrast Ratio (Type)	1200:1 3000:1 4000:1						
	Viewing Angle (Deg)	178/178 Wide						
	Colour		16.7M					
	Response Time	6 ms						
	Display Colours	10bit Dithering - 10.07 Billion						
	Life Time	60,000 Hrs						
	Туре		Internal					
Power	Power Supply	AC 100 ~ 240V, 50/60 Hz						
Pov	Sleep Mode	Less than 0.5W						
	Off Mode	Less than 0.5W						
a)	Color	Full Black						
anc(Surface Treatment	Powder Coated Powder Coated						
Appearance	Shell Material	Cold rolled Aluminium Sheet Body						
)dd	Installation	Wallmount / Ceiling Hanging with brackets						
⋖	Screen Position	Landscape / Portrait						
	Working Temp.	0 - 40 degree						
	Storage Temp.	-15 - 50 degree						
	Working Humidity	20 - 80 percent						
Others	Storage Humidity		10 - 90 percent					
Q t	Loud Speaker		Yes, 8 Ohm/ 5 watt *2 pcs					
	IP Code		IP20					
	Unit Package	PE film +	Foam corner protector + Cartoon or Ho	oneycomb Box				
	Power Consumption		24W					
55.	Accessories	Remote Control(only for Plug 8	& Play and Android), Wallmount Bracket	, Screws, Power Cable, Keys				
ccess.	User Manual		Yes					
Ă	Warranty Card	Yes						
	Plug & Play		Android					
	1. Support multi-types formats for	r video, image, sounds.	Processor: Rockchip® RK3368 (1.5g	hZ, octa core)				
	2. Build-in SD card socket, suppor	t extended storage medium.	RAM: 2 GB DDR Storage: 8 GB Flas	sh				
System	3. Timing function, energy saving & visual pollution.	and reduce noise	Connection: Ethernet (RJ45), WiFi, Bluetooth, 3G & 4G (optional)					
Sy	4. Scheduling and management b	y remote control.	OS Version: Android 7.1					
	5. Easy&fast to update via USB dis	k, various update mode.	WiFi: 802.11b/g/n					
	I/O: USBx1, HDMlx1, SD card plug	x1	I/O: USB2.0*2, RJ-45*1, SD socket*1, HDMI*1,DC*1, Audio*1					
	OS Language: English (Default) -	Multi-language	OS Language: English (Default) - Multi-language					
	ion available upon request.							

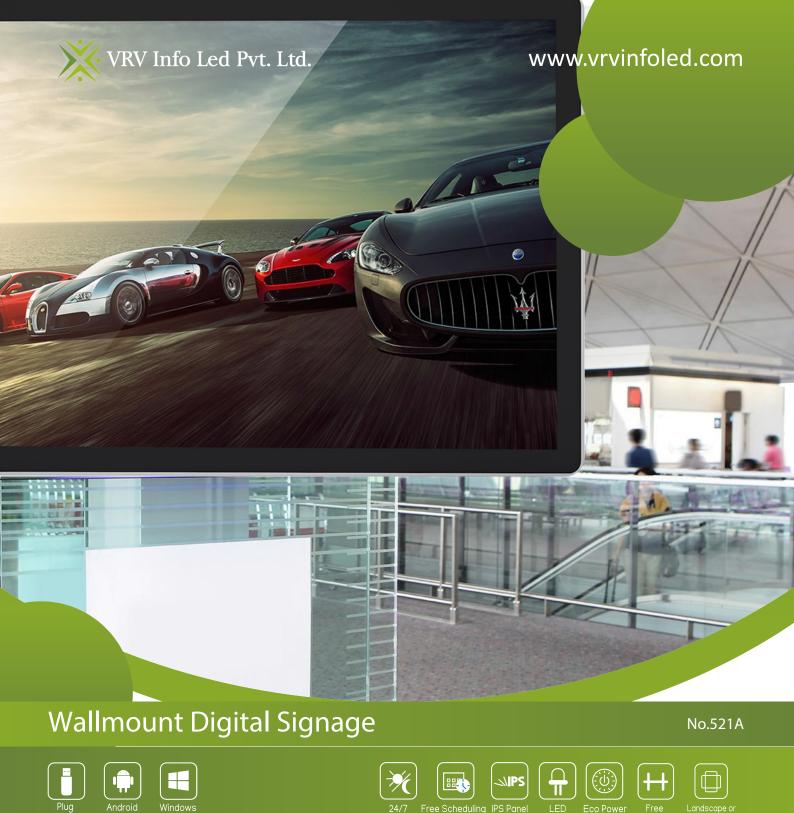

Wall Mounted Digital Display is available in various sizes to meet your signage needs. Get the most out of from the passing by track and enchant show attendees using a digital display. A digital display is the perfect marketing solution to display new products, videos, information and more. Designed as a super tablet, the sleek and tiny look is achieved with a striking aluminum surround and stunning IPX1 rated edge-to-edge glass.

Plug-and-play | High brightness | Ultra slim built | 24/7 operation | Best build Wi-Fi Enabled | Content management system | IPS Panel technology | Multi-Media Connctivity Built-in speakers | Lightweight system | LED Backlight | Optional operating system Tempered glass protection | Screen rotation | Giant tablet styling



	Display Size (inch)	18.5	21.5	27	32	43	49	55	65	
	Resolution	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	
	Active Display Area HxV (mm)	410*230.5	476.8*268.3	599*337	700.5*394.8	941.2*532.4	1070*601	1209.6*680.4	1428.4*803.5	
	Aspect Ratio				1	16:09				
	Brightness (cd/m2)					50 nits				
<u>–</u>	Display Mode		Normally Black, IPS							
Panel	Contrast Ratio	1000:1	1000:1	15001:1	15001:1	1200:1	3000:1	4000:1	4000:1	
	(Type) Viewing Angle (Deg)	178/178 Wide								
	Colour				1	6.7M				
	Response Time					6 ms				
	Display Colours				10bit Ditherir	ng - 10.07 Billion				
	Life Time	60,000 Hrs								
	Туре		Internal							
/er	Power Supply		AC 100~240v,50/60 Hz							
Power	Sleep Mode		Less than 0.5W							
_	Off Mode		Less than 0.5W							
	Color				Silver Black Fran	ne and Black Bo	dy			
Appearance	Surface Treatment				Powd	er Coated				
ara	Shell Material		Aluminium Frame, Tempered Glass face & Cold rolled Aluminium Sheet Body							
bbe	Installation	Wallmount								
₹	Screen Position				Landscape (D	efault) / Portrait				
	Working Temp.	0 - 40 degree								
	Storage Temp.	-15 - 50 degree								
	Working Humidity	20 - 80 percent								
rs.	Storage Humidity	10 - 90 percent								
Others	Loud Speaker	Yes, 8 Ohm/ 5 watt*2 pcs								
0	IP Code	IP20								
	Unit Package	PE fim + Foam corner protector + Carton or Honeycomb Box								
	Power Consumption					24W				
S.	Accessories	R	emote Control (only for Plug & F	Play and Android)	, Wallmount Bra	cket, Screws, P	ower Cable, Keys		
Access.	User Manual					Yes				
ĕ	Warranty Card					Yes				
	Plug & Play			Android			PC - Pentiu	ım i3		
	1. Support multi-types image, sounds.	formats for vid	leo,	Processor: Ro (1.5ghz, octa c	ckchip® RK3368 core)		Processor: Int (1.7GHz ~ 1.9	el® i3 40xxU GHz, dual core)		
	2. Build-in SD card sock storage medium.	ket, support ex	tended	RAM: 2 GB DDR Sto	orage: 8 GB Flash		RAM: 8G DDR3 Storage: 500 HDD			
_	3. Timing function, ene		l reduce		thernet (RJ45), W & 4G (optional)	iFi,	Connection: E	Ethernet (RJ45), W tional)	iFi,	
System	4. Scheduling and man remote control.	agement by		OS Version: Android 7.1			OS: Windows (unactivated) or Linux			
	5. Easy & fast to update update mode.	via USB disk, v	various	WiFi: 802.11b/g/n		I/O: DC 12V*1, RJ45*1, VGA*1(output), USB*4, HDMI*1(output), Audio*1(output), Microphone(input)				
	I/O: USBx1, HDMlx1, SD car	d plugx1		I/O: USB2.0*2, HDMI*1,DC*1,	RJ-45*1, SD socke Audio*1	et*1,				
	OS Language: English (Default) - Mult	i-language		OS Language:		ge	OS Language English (Defa	: ult) - Multi-langua	ge	



Floor Standing Kiosk

No.522A



















hnology Backlight Timer

Ultra-slim LCD displays allow consumers to seamlessly navigate a range of relevant content without interference from surrounding light or environmental conditions. The intergrated, powerful operating system offers users exciting capabilities to deliver rich, engaging content with minimal operational burden required. Beyond a potential for sales and engagement, businesses also benefit from the reduced total operational costs that come with a low-maintenance, hassle-free visual display upgrade.

Plug-and-play | High brightness | Ultra slim built | 24/7 operation | Best build Wi-Fi Enabled | Content Management system | IPS Panel technology Multi-Media connctivity | Built-in speakers | Lightweight design | LED Backlight Optional operating system | Tempered glass protection | Integrated castors



	Display Size (inch)	32	43	49	55	65				
	Resolution	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080				
	Active Display Area H*V (mm)	700.5*394.8	941.2*532.4	1070*601	1209.6*680.4	1428.4*803.5				
	Aspect Ratio			16:09						
	Brightness (cd/m2)			350 nits						
Panel	Display Mode	Normally Black, IPS								
Pa	Contrast Ratio (Type)	1200:1	1200:1 1200:1 3000:1 4000:1 4000:1							
	Viewing Angle (Deg)			178/178 Wide						
	Colour			16.7M						
	Response Time			6 ms						
	Display Colours			10bit Dithering - 10.07	Billion					
	Life Time		60,000 Hrs							
	Туре			Internal						
Power	Power Supply		AC 100 ~ 240V, 50/60 Hz							
Ро	Sleep Mode		Less than 0.5W							
	Off Mode			Less than 0.5W						
υ	Color		Silv	ver Black Frame and Bla	ack Body					
Appearance	Surface Treatment		Powder Coated							
ear	Shell Material	Aluminium Frame, Tempered Glass face & Cold rolled Aluminium Sheet Body								
٨рр	Installation	Floor Standing								
	Screen Position	Protrait (Default)								
	Working Temp.	0 - 40 degree								
	Storage Temp.	-15 - 50 degree								
10	Working Humidity	20 - 80 percent								
Others	Storage Humidity	10 - 90 percent								
Ot	Loud Speaker		Yes, 8 Ohm/ 5 watt *2 pcs							
	IP Code			IP20						
	Unit Package		PE film + Foam		rton or Honeycomb Box					
	Power Consumption			24W						
ess.	Accessories	Remote Conti	rol(only for Plug & Play a		nding Base, Screws, Pow	er Cable, Keys				
Acce	User Manual			Yes						
	Warranty Card			Yes	DC D :: :2					
	Plug & Play		Android	DV0040 (4 5 1 7	PC - Pentium i3	11/4 = 611				
	1. Support multi-types formats image, sounds.		Processor: Rockchip® octa core)		Processor: Intel i3 40x 1.9GHz, dual core)	·				
	Build-in SD card socket, supp storage medium.	ort extended	RAM: 2 GB DDR Stor	age: 8 GB Flash	RAM: 8G DDR3 Stora					
ج	3. Timing function, energy savinoise& visual pollution.	ng and reduce	Connection: Ethernet Bluetooth, 3G & 4G (o		Connection: Ethernet Bluetooth (optional)	port (RJ45), WiFi,				
System	4. Scheduling and managemen control.	t by remote	OS Version: Android 7	'.1	OS: Windows (unactiv	vated) or Linux				
	5. Easy&fast to update via USB of update mode.	disk, various	WiFi: 802.11b/g/n		I/O: DC 12V*1, RJ45*1, VGA*1(output), USB*4,					
	I/O: USB*1, HDMI*1, SD card plu	ug*1	I/O: USB2.0*2, RJ-45*1, SD socket*1, HDMI*1,DC*1, Audio*1		I/O: DC 12V*1, RJ45*1, VGA*1(output), USB*4, HDMI*1(output), Audio*1(output), Microphone(input)					
	OS Language: English (Default Multi-language) -	OS Language: English Multi-language	n (Default) -	OS Language: Englis Multi-language	h (Default) -				



Double Side Hanging Screen

No.540A



















Turn window shoppers into customers through this innovative double-sided hanging digital advertising screen. Easy to install and easy to upload dynamic content, these super sleek digital screens will help you add sales and build your brand value. With an integrated android media player or easy to use Plug & Play technology you will soon be wowing customers with FHD video and images. Designed for storefronts, these dual-sided Digital Signage screens have an outside facing display with high brightness and an inward-facing display with a strong brightness of ensuring that both screens are viewable to their audience.



	Display Size (inch)	43	49	55			
	Resolution	1920*1080	1920*1080	1920*1080			
	Active Display Area HxV (mm)	941.2*532.4	1070*601	1209.6*680.4			
	Aspect Ratio		16:09				
	Brightness (cd/m2)		350 & 1000 nits				
Jel	Display Mode		Normally Black, IPS OPENCELL				
Panel	Contrast Ratio (Type)	1000:1	1000:1	5000:1			
	Viewing Angle (Deg)		178/178 Wide				
	Colour		16.7M				
	Response Time		6 ms				
	Display Colours		10bit Dithering - 10.07 Billion				
	Life Time	60,000 hrs					
	Туре		Internal				
Power	Power Supply		AC 100 ~ 240V, 50/60 Hz				
Ро	Sleep Mode	Less than 0.5W					
	Off Mode	Less than 0.5W					
a	Color		Blue or White				
anc	Surface Treatment		Powder Coated				
Appearance	Shell Material		Cold rolled Aluminium Sheet Body				
۷рр	Installation		Ceiling Hanging				
	Screen Position	Portraint (Default)					
	Working Temp.	0 - 40 degree					
	Storage Temp.	-15 - 50 degree					
	Working Humidity	20 - 80 percent					
Others	Storage Humidity		10 - 90 percent				
Ö	Loud Speaker		Yes, 8 Ohm/5 watt*2 pcs				
	IP Code		IP20				
	Unit Package	PE film +	Foam corner protector + Carton or Hone	ycomb Box			
	Power Consumption		24W				
.55.	Accessories	Remote Control(only for Plug	g & Play and Android), Ceiling mount wire	e ropes, Power Cable			
ccess.	User Manual		Yes				
⋖	Warranty Card	Yes					
	Plug & Play		Android				
	1. Support multi-types formats for video, ir		Processor: Rocketchip RK3368 (1.5				
	2. Build-in SD card socket, support extende		RAM: 2 GB DDR Storage: 8 GB Fla				
System	3. Timing function, energy saving and redu	ce noise& visual pollution.	Connection: Ethernet (RJ45), WiFi, bluetooth 3G&4G (optional)				
Sys	4. Scheduling and management by remote	control.	OS Version: Android 7.1				
	5. Easy& fast to update via USB disk, variou	s update mode.	WiFi: 802.11b/g/n				
	I/O: USBx1, HDMlx1, SD card plugx1		I/O: USB2.0*2, RJ-45*1,SD socket*1, HDMI*1, Audio*1				
	OS Language: English (Default) - Multi-lan	guage	OS Language: English (Default) -	Multi-language			
PC Op	otion available upon request.						



Digital Poster

No.552A

















The smart designed LCD Digital Posters are designed for digital signage applications and replace traditional print media such as billboards, posters, lightboxes, roll up banners, etc. The integrated solid-state media player handles virtually any multimedia format in brilliant full HD resolution. The media player works as a "plug and play" solution, but can also be combined with various digital signage applications to even more complex functions such as enabling network operation. Information, images, movies or multimedia applications can be presented audio-visually and can be comfortably managed by the digital signage software.



	Display Size (inch)	43	49	55				
	Resolution	1920*1080	1920*1080	1920*1080				
	Active Display Area HxV (mm)	941.2*532.4	1070*601	1209.6*680.4				
	Aspect Ratio		16:09					
	Brightness (cd/m2)		350 nits					
ranel	Display Mode	Normally Black, IPS OPENCELL						
<u>a</u>	Contrast Ratio (Type)	1200:1	4000:1					
	Viewing Angle (Deg)	178/178 Wide						
	Colour		16.7M					
	Response Time		6 ms					
	Display Colours		10bit Dithering - 10.07 Billion					
	Life Time	60,000 Hrs						
	Туре	Internal						
ر 2	Power Supply	AC 100 ~ 240V, 50/60 Hz						
D NO	Sleep Mode	Less than 0.5W						
	Off Mode	Less than 0.5W						
บ	Color	Black or White Full Body with Aluminium or Black Frame						
<u>م</u>	Surface Treatment	Powder Coated						
ĕ	Shell Material	Aluminium Frame, Te	mpered Glass face & Cold rolled Aluminiun	n Sheet Body				
	Installation	Floor Standing - Slanding Type						
	Screen Position	Portraint (Default)						
	Working Temp.	0 - 40 degree						
	Storage Temp.	-15 - 50 degree						
•	Working Humidity	20 - 80 percent						
Officers	Storage Humidity		10 - 90 percent					
3	Loud Speaker		Yes, 8 Ohm/ 5 watt*2 pcs					
	IP Code		IP20					
	Unit Package	PE film + F	Foam corner protector + Carton or Honeyco	omb Box				
	Power Consumption		24W					
.22	Accessories	Remote Control(only for Plug & Play and Android), Power Ca	able, Keys				
יררבאא.	User Manual		Yes					
<u> </u>	Warranty Card		Yes					
	Plug & Play		Android					
	1. Support multi-types formats for		Processor: Rocketchip RK336 (1.5ghz, c	octa core)				
	2. Build-in SD card socket, suppor		RAM: 2 GB DDR Storage: 8 GB Flash					
Jystelli	3. Timing function, energy saving visual pollution.		Connection: Ethernet (RJ45), WiFi, Bluetooth, 3G & 4G (optional)					
rî	4. Scheduling and management b		OS Version: Android 7.1					
	5. Easy&fast to update via USB dis	k, various update mode.	WiFi: 802.11b/g/n					
	I/O: USBx1, HDMlx1, SD card plug	x1	I/O: USB2.0*2, RJ-45*1, SD socket*1, HDMI*1, DC*1, Audio*1					
	OS Language: English (Default) - I	Multi-language	OS Language: English (Default) - Multi-	-language				



Elevator Screen

No. 561A





















Elevator Screens let you reach out to the elevator occupants as they visit the buildings. From here you can properly grasp the attention of your business viewers. It is an easy way to provide targeted advertisements that will appeal to your audiences. Thus, Digital Signage in elevators of a marketable or domestic building has the potential to raise your customer base.



	Display Size (inch)	18.5	21.5			
	Resolution		1920*1080			
	Active Display Area HxV (mm)	410*230.5	476.8*268.3			
	Aspect Ratio		16:09			
	Brightness (cd/m2)		350 nits			
<u> </u>	Display Mode		Normally Black, IPS			
Panel	Contrast Ratio (Type)		1000:1			
	Viewing Angle (Deg)		178/178 Wide			
	Colour		16.7M			
	Response Time		6 ms			
	Display Colours	10bit Dithering - 10.07 Billion				
	Life Time		60,000 Hrs			
	Туре		Internal			
Power	Power Supply		AC 100 ~ 240V, 50/60 Hz			
Pov	Sleep Mode		Less than 0.5W			
	Off Mode		Less than 0.5W			
d)	Color		Steel or White Glass body			
nce	Surface Treatment		Powder Coated			
eara	Shell Material	Aluminium Frame, Tempered Glass face & Cold rolled Aluminium Sheet Body				
Appearance	Installation		Wallmount			
< <	Screen Position		Landscape / Portrait			
	Working Temp.		0 - 40 degree			
	Storage Temp.		-15 - 50 degree			
	Working Humidity		20 - 80 percent			
Others	Storage Humidity		10 - 90 percent			
Oth	Loud Speaker		Yes, 8 Ohm/ 5 watt *2 pcs			
	IP Code		IP20			
	Unit Package	PE film +	Foam corner protector + Carton or Honeycomb Box			
	Power Consumption		24W			
s,	Accessories	Remote Control(only for Plug & I	Play and Android), Wallmount Bracket, Screws, Power Cable, Keys			
ccess.	User Manual		Yes			
¥	Warranty Card		Yes			
	Plug & Play		Android			
	1. Support multi-types formats for video,	image, sounds.	Processor: Rockchip® RK3368 (1.5ghZ, octa core)			
	2. Build-in SD card socket, support extend	led storage medium.	RAM: 2 GB DDR Storage: 8 GB Flash			
System	3. Timing function, energy saving and red	luce noise& visual pollution.	Connection: Ethernet (RJ45), WiFi, Bluetooth, 3G & 4G (optional)			
Syst	4. Scheduling and management by remot	te control.	OS Version: Android 7.1			
	5. Easy&fast to update via USB disk, variou	us update mode.	WiFi: 802.11b/g/n			
	I/O: USBx1, HDMlx1, SD card plugx1		I/O: USB2.0*2, RJ-45*1, SD socket*1, HDMI*1,DC*1, Audio*1			
	OS Language: English (Default) - Multi-la	nguage	OS Language: English (Default) - Multi-language			



Wallmount Interactive Touch Screen

No. 521AT

















Interactive Touch screens are suitable for various applications including shopping mall directory, building directory as well as for payment purpose. We make our solutions according specific requirement of the clients.

Currently a major trend, interactive kiosks are an excellent way to capture people's attention and get your messages out. Consumers do their own searches on a touch screen, automatically letting you know what they are interested in. They have a positive impact on your brand image, presenting you as a modern, innovative business.


With interactive screens, you can provide a self-service solution to the public, which will increase your service level. With product catalogs and product search guides your customers will easily and what they are specific requirement of the clients, an innovative business looking for.

Plug-and-play | High brightness | Ultra slim built | 24/7 operation | Best build | Wi-Fi Enabled Content management system | IPS Panel technology | Multi-Media connectivity | Built-in speakers Lightweight design | LED Backlight | Pro-Cap touch interactive technology Optional operating system | Tempered glass protection | Screen rotation | Giant tablet stylling





	Display Size (inch)	18.5	21.5	27	32	43	49	55	65		
	Resolution	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080		
	Active Display Area HxV (mm)	410*230.5	476.8*268.3	599*337	700.5*394.8	941.2*532.4	1070*601	1209.6*680.4	1428.4*803.5		
	Aspect Ratio				1	16:09					
	Brightness (cd/m2)		350 nits								
او	Display Mode		Normally Black, IPS								
Panel	Contrast Ratio (Type)	1000:1	1000:1	1500:1	1500:1	1200:1	3000:1	4000:1	4000:1		
	Viewing Angle (Deg)				178/	178 Wide					
	Colour				1	16.7M					
	Response Time		6 ms								
	Display Colours		10bit Dithering - 10.07 Billion								
	Life Time		60,000 Hrs								
	Туре				In	ternal					
ver	Power Supply				AC 100 ~ 2	240V, 50/60 Hz					
Power	Sleep Mode		Less than 0.5W								
	Off Mode		Less than 0.5W								
d)	Color				Silver Black Fran	ne and Black Bo	dy				
Appearance	Surface Treatment				Powd	er Coated					
eara	Shell Material		Alumi	nium Frame, Te	mpered Glass fac	e & Cold rolled A	luminium She	et Body			
)dd	Installation				Wa	llmount					
⋖	Screen Position	Landscape (Default) / Portrait									
	Working Temp.		0 - 40 degree								
	Storage Temp.	-15 - 50 degree									
	Working Humidity	20 - 80 percent									
srs	Storage Humidity	10 - 90 percent									
Others	Loud Speaker	Yes, 8 Ohm/ 5 watt * 2pcs									
O	IP Code	IP20									
	Unit Package	PE film + Foam corner protector + Carton or Honeycomb Box									
	Power Consumption					24W					
SS.	Accessories	R	emote Control (only for Plug &	Play and Android)	, Wallmount Bra	cket, Screws, P	ower Cable, Keys			
Access	User Manual					Yes					
Ā	Warranty Card					Yes					
	Plug & Play			Android			PC - Pentiu	ım i3			
	1. Support multi-types image, sounds.	formats for vid	eo,	Processor: Roo (1.5ghZ octa	ckchip RK3368 core)		Processor: Intel i3 40xxU (1.7GHz ~ 1.9GHz, dual core)				
	2. Build-in SD card sock storage medium.	ket, support ext	tended	RAM: 2 GB DDR Sto	orage: 8 GB Flash		RAM: 8 GB DDR3 S	Storage: 500 HDD			
۳	3. Timing function, ene noise & visual pollution		reduce		thernet (RJ45), W & 4G (optional)	iFi,	Connecton: E Bluetooth (op	thernet port (RJ45 otional)), WiFi,		
System	4. Scheduling and man remote control.	agement by		OS Version: Android 7.1			OS: Windows (unactivated) or Linux		(
	5. Easy & fast to update update mode.	e via USB disk, v	rarious	WiFi: 802.11 b/g/n			I/O: DC 12V*1, RJ45*1, VGA*1 (output), USB*4, HDMI*1(output), Audio*1 (output), Microphone(input)				
	I/O: USB*1, HDMI*1, SD care	d plug*1		I/O: USB2.0*2, HDMI*1, DC*1	RJ-45*1, SD sock , Audio*1	et*1,					
	OS Language: English (Default) - Multi-language OS Language: English (Default) - Multi-language OS Language: English (Default) - Multi-language English (Default) - Multi-language								ae		

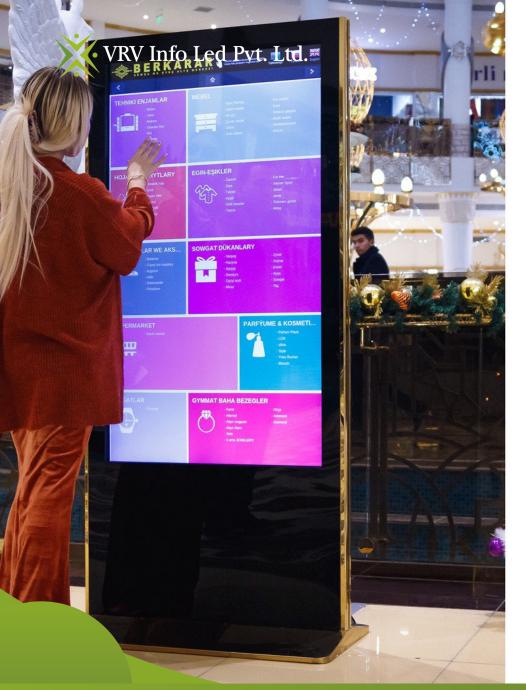



Floor Standing Interactive Touch Kiosk

No.522AT





















n vv

Interactive Touch screens are suitable for various applications including shopping mall directory, building directory as well as for payment purpose. We make our solutions according to the specific requirements, Currently a major trend, interactive kiosks are an excellent way to capture people's attention and get your messages out. Consumers do their own searches on a touch screen, automatically letting you know what they are interested in. They have a positive impact on your brand image, presenting you as a modern, With interactive screens, you can provide a self-service solution to the public, which will increase your service level. With product catalogs and products, search guides your customer will easily and what they looking for.

Plug-and-play | High brightness | Ultra slim built | 24/7 operation | Best build Wi-Fi Enabled | Content Management system | IPS Panel technology Multi-Media connectivity | Built-in speakers | Lightweight design | LED backlight Pro-Cap touch interactive technology | Optional Operating system Tempered glass protection | Integrated cators





	S: 1 S: (1-1)									
	Display Size (inch)	32	43	49	55	65				
	Resolution	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080				
	Active Display Area HxV (mm)	700.5*394.8	941.2*532.4	1070*601	1209.6*680.4	1428.4*803.5				
	Aspect Ratio			16:09						
<u></u>	Brightness (cd/m2)			350 nits						
Panel	Display Mode	Normally Black, IPS								
<u>. </u>	Contrast Ratio (Type)	1200:1	1200:1	3000:1	4000:1	4000:1				
	Viewing Angle (Deg)	178/178 Wide								
	Colour	16.7M								
	Response Time	6 ms								
	Display Colours	10bit Dithering - 10.07 Billion								
	Life Time		60,000 Hrs							
	Touch Screen Type Touch Condition		Capac	itive Touch (PCAP Touc	n Film)					
en		Finger, Touch Pen 10 Point								
Touch Screen	Touch Points Response Time	10 Point ≤10m-sec								
C C	Sensor Quantity	≤10m-sec 4K								
nol	Touch Accuracy									
	Light Transmittance	±1mm ≥89%								
	Type			Internal						
Power	Power Supply	Internal AC 100 ~ 240V, 50/60 Hz								
	Sleep Mode		,	Less than 0.5W	-					
	Off Mode	Less than 0.5W								
	Color		Silver	Black Frame and Black	Body					
JCe	Surface Treatment			Powder Coated	,					
araı	Shell Material	Aluminium Frame, Tempered Glass face & Cold rolled Aluminium Sheet Body								
Appearance	Installation	Floor Standing								
₹	Screen Position	Protrait (Default)								
	Working Temp.	0 - 40 degree								
	Storage Temp.			-15 - 50 degree						
	Working Humidity			20 - 80 percent						
ers	Storage Humidity			10 - 90 percent						
Others	Loud Speaker		Y	es, 8 Ohm/ 5 watt *2 pc	CS					
	IP Code			IP20						
	Unit Package		PE film + Foam o	corner protector + Carto	on or Honeycomb Box					
	Power Consumption			24W						
SS.	Accessories	Remote Control(only for Plug & Play and	l Android), Floor Standi	ng Base, Screws, Power C	Cable, Keys				
Access.	User Manual			Yes						
ď	Warranty Card			Yes						
	Android			PC - Pentium i3						
	Processor: Rockchip® RK	3368 (1.5ghZ, octa core)		Processor: Intel® i3 40xxU (1.7GHz ~ 1.9GHz, dual core)						
	RAM: 2 GB DDR Storage	e: 8 GB Flash		RAM: 8G DDR3 Stor	AM: 8G DDR3 Storage: 500 HDD					
em		45), WiFi, Bluetooth, 3G &	4G (optional)		t port (RJ45), WiFi, Blueto	ooth (optional)				
System	OS Version: Android 7.1			OS: Windows (unacti	vated) or Linux					
<i>O</i> 1	WiFi: 802.11b/g/n				1, VGA*1(output), USB*4,					
	I/O: USB2.0*2, RJ-45*1, SI	D socket*1, HDMI*1,DC*1,	Audio*1	I/O: DC 12V*1, RJ45* Audio*1(output), Mid	1, VGA*1(output), USB*4, crophone(input)	HDMI*1(output),				
	OS Language: English (D	efault) - Multi-language		OS Language: Englis	h (Default) - Multi-langua	age				



Interactive Touch Kiosk

No. 523A























Interactive kiosks are an excellent way to capture people's attention and get your messages out. Consumers do their own searches on a touch screen, automatically letting you know what they are interested in. They have a positive impact on your brand image, presenting you as a modern, innovative business. Simple, intuitive and fun to use, interactive terminals provide real added value at a trade show or exhibition, in-store, or during promotional events in public spaces. With interactive screens, you can provide a self-service solution to the public, which will increase your service level. With product catalogs and products, search guides your customer will easily and what they are looking for.

Plug-and-play | High brightness | Ultra slim built | 24/7 operatio | Best build Wi-Fi Enabled | Content management system | IPS Panel technology | Multi-Media connectivity Built-in speakers | Lightweight design | LED backlight | Pro-cap touch interactive technology Optional operating system | Tempered glass protection | Giant tablet styling | Integrated castors





	Display Size (inch)	18.5	21.5	27	32	43	49	55			
	Models Available	К	К	K	K, S, Y, T	K, S, Y, T	K, S, Y, T	K, S, Y, T			
	Resolution	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080			
	Active Display Area HxV (mm)	410*230.5	476.8*268.3	599*337	700.5*394.8	941.2*532.4	1070*601	1209.6*680.4			
	Aspect Ratio				16:09						
<u>a</u>	Brightness (cd/m2)				350 nits						
Panel	Display Mode	Normally Black, IPS									
	Contrast Ratio (Type)	1000:1	1000:1	1500:1	1500:1	1200:1	3000:1	4000:1			
	Viewing Angle (Deg)	178/178 Wide									
	Colour				16.7M						
	Response Time				6 ms						
	Display Colours		10bit Dithering - 10.07 Billion								
	Life Time				60,000 Hrs						
	Touch Screen Type		'Capacitive Touch (PCAP G+G)		Capacitive	Touch (PCAP To	uch Film)			
_	Touch Condition			Fin	ger, Touch Pen						
reel	Touch Points		10 Point								
Touch Screen	Response Time		≤10m - sec								
nct	Sensor Quantity				4K						
ĭ	Touch Accuracy				±1mm						
	Light Transmittance				≥89%						
	Туре				Internal						
Power	Power Supply			AC 10	0 ~ 240V, 50/60 H	lz					
Ро	Sleep Mode		Less than 0.5W								
	Off Mode		Less than 0.5W								
d)	Color		Silver Black Frame a	and Black Body -	(Color can be cus	stomizable upon re	equest)				
Appearance	Surface Treatment		Powder Coated								
eara	Shell Material	Aluminium Frame, Tempered Glass face & Cold rolled Aluminium Sheet Body - customized color									
ďď	Installation	Intalled on the Base									
	Screen Position			Land	dscape (Default)						
	Working Temp.	0 - 40 degree									
	Storage Temp.			-	15 - 50 degree						
10	Working Humidity	20 - 80 percent									
ners	Storage Humidity				10 - 90 percent						
5	Loud Speaker			Yes,	8 Ohm/ 5 watt*2	pcs					
	IP Code				IP20						
	Unit Package		PE fi	ilm + Foam corn	· ·	rton or Honeycom	b Box				
	Power Consumption				24W						
355.	Accessories			Screws,	Power Cable, Key	/S					
Access.	User Manual				Yes						
	Warranty Card			DC D. II	Yes						
	Android	V2260 (1 5 -1-7 ·		PC - Pentiu		Ch= 10Ch= 1	-1)				
	Processor: Rockchip R		a core)			Ghz ~ 1.9Ghz du	al core)				
	RAM: 2 GB DDR Stora Connection: Ethernet		aath		R3 Storage: 500						
em	3G & 4G (optional)		σοιτι,		•	RJ45), WiFi, Blueto	ooth(optional)				
System	OS Version: Android 7.	.1			(unactivated) o						
-01	WiFi: 802.11 b/g/n				1, RJ45*1, VGA* out), Microphon	1(output), USB*4, e(input)	HDMI*1(outpu	t),			
	I/O: USB2.0*2, RJ-45*1 HDMI*1, DC*1, Audio*			OS Language	e: English (Defa	ult) - Multi-langua	age				
	OS Language: English	(Default) - Multi-la	anguage	Other PC Cor	nfiguration may	be supplied upo	n request of th	e client			
































Screen Rotatable Information Kiosk can be either landscape or portrait screen view while checking information. Touch kiosk is ideal for self-service or information query, with remote control and management. Supports splitting the screen into multiple windows with different content being reproduced in each of them.

Plug-and-play | High brightness | Ultra slim built | 24/7 operation | Best build Wi-Fi Enabled | Content management system | IPS Panel technology Multi-Media connectivity | Built-in speakers | Lightweight design | LED Backlight Optional operating system | Pro-Cap touch | Interactive technology(Optional) Tempered glass protection | Screen rotation | Giant tablet styling | Integrated castors





	Display Size (inch)	43	49 55						
	Resolution	1920*1080	1920*1080	1920*1080					
	Active Display Area HxV (mm)	941.2*532.4	1070*601	1209.6*680.4					
	Aspect Ratio		16:09						
	Brightness (cd/m2)		350 nits						
le l	Display Mode		Normally Black, IPS						
Panel	Contrast Ratio (Type)	1200:1	4000:1						
	Viewing Angle (Deg)								
	Colour		16.7M						
	Response Time		6 ms						
	Display Colours		10bit Dithering - 10.07 Billion						
	Life Time		60,000 Hrs						
	Touch Screen Type	Capacitive Touch (PCAP Touch Film)							
Ē	Touch Condition		Finger, Touch Pen						
Tocuh Screen	Touch Points		10 Point						
h Sc	Response Time		≤10m-sec						
noc	Sensor Quantity		4K						
ř	Touch Accuracy	±1mm							
	Light Transmittance	≥89%							
	Туре	Internal							
Power	Power Supply	AC 100 ~ 240V, 50/60 Hz							
Ро	Sleep Mode	Less than 0.5W							
	Off Mode		Less than 0.5W						
بو	Color		Whie Body & Frame						
Appearance	Surface Treatment	Powder Coated							
ear	Shell Material	Cold rolled Aluminium Sheet Body							
Арк	Installation	Floor Standing							
	Screen Position		Portraint or Landscape						
	Working Temp.		0 - 40 degree						
	Storage Temp.	-15 - 50 degree							
S	Working Humidity		20 - 80 percent						
Other	Storage Humidity	10 - 90 percent							
ō	Loud Speaker IP Code		Yes, 8 Ohm/ 5 watt *2 pcs						
	Unit Package	DE film I E	Foam corner protector + Carton or Hon	ovcomb Pov					
	Power Consumption	r L IIIIII T I	24W	eycomb box					
	Accessories	Remote Control(only for Plug & Pl	ay and Android), Floor Standing Base,	Screws, Power Cable, Keys					
Access.	User Manual	nemote control(only for riag a ri	Yes	serems, i ower cubic, neys					
Acc	Warranty Card		Yes						
	Android		PC - Pentium i3						
	Processor: Rockchip® RK3368 (1.59	ghZ. octa core		I.9GHz. dual core)					
	RAM: 2 GB DDR Storage: 8 GB Fla		Processor: Intel® i3 40xxU (1.7GHz ~ 1.9GHz, dual core) RAM: 8G DDR3 Storage: 500 HDD						
ج	Connection: Ethernet (RJ45), WiFi,		Connection: Ethernet port (RJ45), WiFi, Bluetooth (optional)						
System	OS Version: Android 7.1		OS: Windows (unactivated) or Linux	(,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,					
Sy	WiFi: 802.11b/g/n		I/O: DC 12V*1, RJ45*1, VGA*1(output), USB*4,						
	I/O: USB2.0*2, RJ-45*1, SD socket*	1, HDMI*1,DC*1, Audio*1	I/O: DC 12V*1, RJ45*1, VGA*1(output Audio*1(output), Microphone(input)), USB*4, HDMI*1(output),					
	OS Language: English (Default) - N	Multi-language	OS Language: English (Default) - Multi-language						

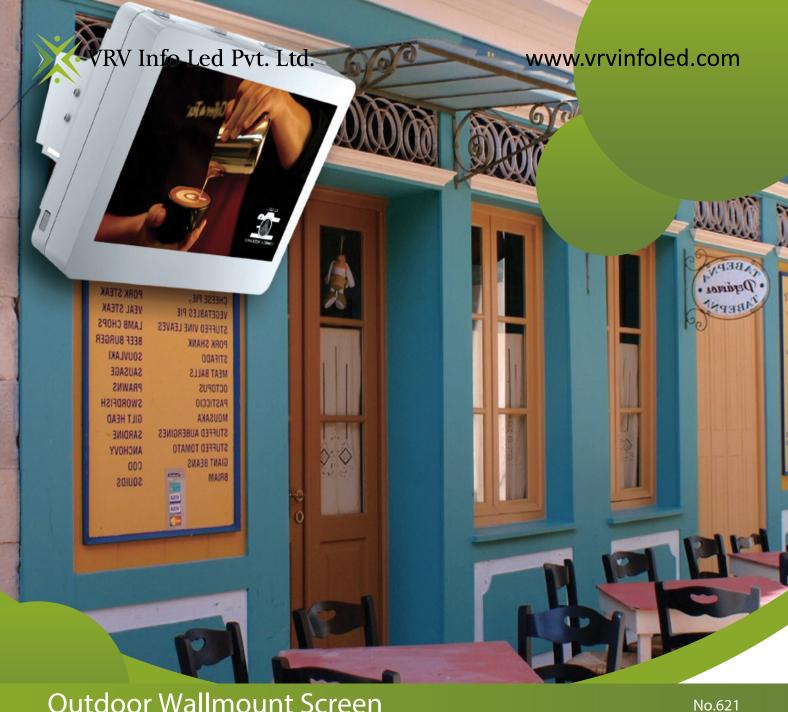

Outdoor Wallmount Screen





























Plug Android Windows and Play Media Player Media Player

eduling IPS Panel LED vare Technology Backlight

Suitable for the toughest of outdoor conditions - designed with a full-bodied, weathering protected, outer casing to give protection from both the elements and the public. The outer casing has an IP65 rating which means it keeps out all airborne dust and other particles as well as being protected from any wet weather conditions; broadening the range of possible environments. Designed for the challenge of direct sunlight, these displays use commercial grade ultra-high brightness panels (2,500cd/m2); up to 10 times brighter than a domestic television. The display has a light sensor that changes the screen's brightness depending on the ambient light ensuring the most suitable brightness at any time of the day.

Plug-and-play | High brightness | 24/7 operation | Best build Wi-Fi Enabled | Content management system | IPS Panel technology Multi-Media connectivity | Built-in speakers | LED Backlight Pro-Cap touch interactive technology | Optional operating system | Tempered glass protection Screen rotation | Giant tablet styling | Sunlight readable



	Display Size (inch)	21.5	32	43	49	55	65				
	Resolution			1920*	1080						
	Active Display Area HxV (mm)	476.8*268.3	700.5 x 394.8	941.2*532.4	1070*601	1209.6*680.4	1428.4*803.5				
	Aspect Ratio		16:09								
	Brightness (cd/m2)	1500 nits	1500 nits	2000 nits	2000 nits	2500 nits	2500 nits				
Panel	Display Mode	Normally Black, IPS									
بې	Contrast Ratio (Type)	1000:1	1000:1 1000:1 1000:1 5000:1 5000:1								
	Viewing Angle (Deg)		178/178 Wide								
	Colour			16.7	7M						
	Response Time			6 n	ns						
	Display Colours	10bit Dithering - 10.07 Billion									
	Life Time			60,000) Hrs						
	Туре	Internal									
ver	Power Supply		AC 100 ~ 240V, 50/60 Hz								
Power	Sleep Mode	Less than 0.5W									
	Off Mode	Less than 0.5W									
a.	Color	Black or White									
nce	Surface Treatment		Powder Coated								
ara	Shell Material		Tempered G	lass face & Cold rol	led Aluminium She	et Body					
Appearance	Installation			Wallm	ount						
Ā	Screen Position			Landscape (Defa	ault) / Portrait						
	Working Temp.	0 - 45 degree									
	Storage Temp.	-30 - 55 degree									
	Working Humidity		10 - 80 percent								
ers	Storage Humidity			5 - 95 pc	ercent						
Others	Loud Speaker			Yes, 8 Ohm/ 5	watt *2 pcs						
	IP Code			IPe	55						
	Unit Package		PE film + F	oam corner protect	tor + Carton or Hor	eycomb Box					
	Power Consumption			24	W						
s.	Accessories	Remote Con	trol(only for Plug & P	lay and Android), W	/allmount Bracket,	Screws, Power Cable,	Keys				
cess.	User Manual			Ye	25						
Acc	Warranty Card			Υe	es .						
	Plug & Play			Android							
	1. Support multi-types form	ats for video, image, s	sounds.	Processor: Rocko	chip® RK3368 (1.5gl	nZ, octa core)					
	2. Build-in SD card socket, su	upport extended stor	age medium.	RAM: 2 GB DDR Storage: 8 GB Flash							
System	3. Timing function, energy spollution.	aving and reduce noi	se& visual	Connection: Ethernet (RJ45), WiFi, Bluetooth, 3G & 4G (optional)							
Sys	4. Scheduling and managen	nent by remote contr	ol.	OS Version: Andr	oid 7.1						
	5. Easy&fast to update via U	SB disk, various upda	te mode.	WiFi: 802.11b/g/r	1						
	I/O: USBx1, HDMIx1, SD card			I/O: USB2.0*2, RJ-	45*1, SD socket*1,	HDMI*1,DC*1, Audio*	·1				
	OS Language: English (Defa	ult) - Multi-language		I/O: USB2.0*2, RJ-45*1, SD socket*1, HDMI*1,DC*1, Audio*1 OS Language: English (Default) - Multi-language							



Outdoor Floor Standing Kiosk

No.622





























uling IPS Panel LED e Technology Backlight

Outdoor LCD displays directly connect with the audience and attract potential customers. Designed with a robust, corrosion protected, outer casing to give protection from the elements. The outer casing has an IP65 rating which means it keeps out airborne swarf, dust, and other particles as well as being protected from any wet weather conditions. The internal arrow system keeps your screen running at the optimal temperature regardless of the external conditions to maximize the life of your product. Built-in air-conditioning can be tailored to allow the display to work in any climate. The enclosure is made from mild steel as well as having a thermally toughened glass front. Controls and inputs are also hidden and not accessible to passers-by to avoid tampering. Designed for the challenge of direct sunlight, these displays use commercial grade ultra-high brightness panels (2,500 cd/m2); up to 10 times brighter than a domestic television.

Plug-and-play | High brightness | Ultra slim built | 24/7 operation | Best build | Wi-Fi Enabled Content management system | IPS Panel technology | Multi-Media connectivity | Built-in speakers LED Backlight | Pro-Cap Touch interactive technology | Optional operating system Tempered glass protection | Integrated castors | Sunlight readable



	Display Size (inch)	43	49	55	65	75					
	Resolution	13	13	1920*1080	03	/3					
	Active Display Area HxV (mm)	941.2*532.4	1070*601	1209.6*680.4	1428.4*803.5	1650.24*928.26					
	Aspect Ratio	711.2 332.1	1070 001	16:09	1 120.1 003.5	1030.21 720.20					
	Brightness (cd/m2)	2000 nits	2000 nits	2500 nits	2500 nits	2500 nits					
<u> </u>	Display Mode	2000 11103	2000 11113	Normally Black, IPS	2300 11113	2500 11105					
Panel	Contrast Ratio (Type)	1000:1	1000:1	1000:1	1000:1	5000:1					
	Viewing Angle (Deg)	178/178 Wide									
	Colour		16.7M								
	Response Time	6 ms									
	Display Colours	10bit Dithering - 10.07 Billion									
	Life Time	60,000 Hrs									
ver	Туре			Internal							
	Power Supply	AC 100 ~ 240V, 50/60 Hz									
Power	Sleep Mode	Less than 0.5W									
	Off Mode	Less than 0.5W									
Appearance	Color	Black or White									
	Surface Treatment	Powder Coated									
	Shell Material	Tempered Glass face & Cold rolled Aluminium Sheet Body									
edd.	Installation	Floor Standing									
⋖	Screen Position	Landscape (Default) / Portrait									
	Working Temp.	0 - 45 degree									
	Storage Temp.	-30 - 55 degree									
	Working Humidity	10 - 80 percent									
Others	Storage Humidity	5 - 95 percent									
j	Loud Speaker	Yes, 8 Ohm/ 5 watt *2 pcs									
	IP Code	IP65									
	Unit Package	PE film + Foam corner protector + Wooden Box									
	Power Consumption	24W									
55.	Accessories	Remote Control(only for Plug & Play and Android), Floor Anchor Bolts, Lifting Hanger, Power Cable									
ccess.	User Manual	Yes									
⋖	Warranty Card										
	Plug & Play			Android							
	1. Support multi-types formats fo	r video, image, sounds.		Processor: Rockchip® RK3368 (1.5ghZ, octa core)							
	2. Build-in SD card socket, suppor	t extended storage mediu	ım.	RAM: 2 GB DDR Stor	age: 8 GB Flash						
System	3. Timing function, energy saving visual pollution.	and reduce noise &		Connection: Ethernet (RJ45), WiFi, Bluetooth, 3G & 4G (optional)							
Syst	4. Scheduling and management b	y remote control.		OS Version: Android 7	.1						
	5. Easy&fast to update via USB dis	k, various update mode.		WiFi: 802.11b/g/n							
	I/O: USBx1, HDMlx1, SD card plug	x1		I/O: USB2.0*2, RJ-45*1	, SD socket*1, HDMI*1	,DC*1, Audio*1					
	OS Language: English (De- fault) - Multi-language			OS Language: English (Default) - Multi-language							





Interactive Touch White Board

No. 421

















Presentation Screen/ Interactive Whiteboard integrates the advantages of traditional blackboard and modern communication technologies with which users can operate the computer on the whiteboard by pen or finger in the place of mouse and chalk. Teachers can directly write all kinds of information (notes, diagrams) on the interactive whiteboard by pen or finger; it can achieve the most natural writing without dust. An interactive whiteboard can also be be used in conference discussion, business training, and advertisement announcement or the display and demonstration of the products and resolutions. It facilitates group interaction during virtual meetings and they enable meeting participants to share applications, display brainstorm images and record the meeting notes, the attendees can concentrate on the discussion and freely express their idea, which will improve the practical effect of the meeting.

High brightness | Ultra slim built | 24/7 operation | Best build | Wi-Fi Enabled | Content management system
IPS panel technology | Multi-media connectivity | Lightweight design | LED Backlight
Built-in Software | Infrared touch interactive technology
Tempered glass protection | Giant tablet styling | Dual operating system(Optional)





·	Display Size (inch)	55	65	75	86					
	Resolution		40*2160							
	Active Display Area HxV (mm)	1209.6*680.4	1428.48*803.52	1650.24*928.26	1938.2*1098					
	Aspect Ratio		16:09							
_	Brightness (cd/m2)		350 nit	rs .						
Panel	Display Mode		Normally Black, IPS	OPENCELL						
Pē	Contrast Ratio (Type)	1000:1	1200:1	3000:1	4000:1					
	Viewing Angle (Deg)									
	Colour	16.7M								
	Response Time		6 ms							
	Display Colours	10bit Dithering - 10.07 Billion								
	Life Time	60,000 Hrs								
	Touch Screen Type		IR Touc	h						
_	Touch Condition	Finger, Touch Pen								
Touch Screen	Touch Points		10 Point							
h Sc	Response Time		≤10m-sec							
onc	Sensor Quantity	4K								
T	Touch Accuracy	±1mm								
	Light Transmittance		≥89%							
	Туре		Interna							
Power	Power Supply	AC 100 ~ 240V, 50/60 Hz								
Ро	Sleep Mode	Less than 0.5W								
	Off Mode		Less than 0.5W							
a	Color	Silver Frame and Black Body								
anc	Surface Treatment	Powder Coated Powder Coated								
ear	Shell Material	Cold rolled Aluminium Sheet Body								
Appearance	Installation	Wallmount or Floor Sanding Brackets								
	Screen Position	Landscape (Default)								
	Working Temp.	0 - 40 degree								
	Storage Temp.	-15 - 50 degree								
Ņ	Working Humidity	20 - 80 percent								
Other	Storage Humidity	10 - 90 percent								
ō	Loud Speaker IP Code	Yes, 8 Ohm/5 watt*2 pcs								
	Unit Package	IP20 PE film + Foam corner protector + Carton or Honovcomb Roy								
	Power Consumption	PE film + Foam corner protector + Carton or Honeycomb Box 24W								
	Accessories	Screws, Power Cable, Keys								
Access.	User Manual		Yes	abic, Reys						
Acc	Warranty Card		Yes							
	Android		PC - Pentium i3							
	Processor: Rockchip RK3368	8(1.5ghZ, Octa core)	Processor: Intel i3 40xxU (1.7Ghz ~ 1.9Ghz, dual core)							
	RAM: 2 GB DDR Storage: 8		RAM: 8G DDR3 Storage: 500 HDD							
E	Connection: Ethernet (RJ45) (optional)		Connection: Ethernet port (RJ45), WiFi, Bluetooth (optional)							
System	OS Version: Android 7.1		OS: Windows (unactivated) or Linux							
S	WiFi: 802.11 b/g/n		I/O: DC 12V*1, RJ45*1, VGA*1(output), USB*4							
	I/O: USB2.0*2, RJ-45*1, SD so Audo*1	ocket*1, HDMI*1,DC*1,	I/O: DC 12V*1, RJ45*1, VGA*1(output), USB*4, HDMI*1(output), Audio*1(output), Microphone(input)							
	OS Language: English (Defa	ult) - Multi-language	OS Language: English (Default) - Multi-language							



Video Wall

















A video wall is a highly visible communication channel that creates a lasting impression on visitors. A video wall is made up of multiple displays placed closely together or overlapped in order to create on the large display. They can be used to display one large image, or multiple small images on each display at once.

Video walls are a powerful way to break through the clutter and engage with your intended audience. Mix and match display, rotate your screens and get creative with your display's layout. Display one large piece of content across all screens, or different pieces of content on each screen. Video wall displays are designed to work in ambient lighting without any glare.

video walls are used by leading retailers, airports, businesses, public venues, and display at once educational facilities around the world educational facilities around the world High brightness | Ultra slim built | 24/7 operation | Best build | IPS Panel technology Multi-Media connectivity | Lightweight design | LED backlight | Optional operating system Ultra narrow beze | Daisy cain | Tiling system



	Display Size (inch)	46			49			55					
	Resolution		1920*1080			1920*1080		1920*1080					
	Outline Dimension (mm)	1023 *578 *133	1021 *576 *121	1019 *572 *120	1077 *607 *113	1077 *607 *113	1077 *607 *113	1213 *684 *118	1213 *684 *118	1213 *684 *118	1213 *684 *118		
	Bezel (mm)	5.5	3.5	1.7	3.5	1.8	1.8	3.5	3.5	1.8	1.8		
	Aspect Ratio					1	6:09						
-	Brightness (cd/m2)	500 nits	500 nits	500 nits	500 nits	500 nits	700 nits	500 nits	700 nits	500 nits	700 nits		
Panel	Display Mode					Normall	y Black, IPS						
а.	Contrast Ratio (Type)	1200:1	1200:1	1200:1	1200:1	1200:1	1200:1	1400:1	1400:1	1400:1	1400:1		
	Viewing Angle (Deg)	178/178 Wide											
	Colour	16.7M											
	Response Time	6 ms											
	Display Colours	10bit Dithering - 10.07 Billion											
	Life Time	60,000 Hrs											
	Туре	Internal											
Power	Power Supply	AC 100 ~ 240V, 50/60 Hz											
	Sleep Mode	Less than 0.5W											
	Off Mode	Less than 0.5W											
	Color	Full Black											
Appearance	Surface Treatment	Powder Coated											
ear	Shell Material	Aluminium Frame and Metal Body											
Арр	Installation	Wallmount											
	Screen Position	Landscape/ Portrait											
Sys.*	Processor					То	choose						
	Working Temp.					0 - 40) degree						
	Storage Temp.	-15 - 50 degree											
ers	Working Humidity					20 - 80) percent						
Others	Storage Humidity					10 - 90) percent						
	IP Code						P20						
	Unit Package			PE	film + Foan	n corner pro	tector + Carl	on or Honeyo	omb Box				
	Power Consumption						24W						
ıċ	Accessories					Wallmour	nt Bracket Kit						
Access.	User Manual						Yes						
Aco	Warranty Card						Yes						



Double Side Floor Standing Kiosk

Type A - No.522DA



























Turn window shoppers into customers through this innovative double-sided Floor standing digital advertising screen. Easy to install and easy to upload dynamic content, these double-sided iPhone style digital displays will help you add sales and build your brand value. With an integrated android media player or easy to use Plug & Play technology you will soon be wowing customers with FHD video and images. Designed for storefronts, these dual-sided Digital Signage screens have an outside facing display with high brightness and an inward-facing display with a strong brightness of ensuring that both screens are viewable to their audience.

Plug-and-play | High brightness | 24/7 operation | Best build Wi-Fi Enabled | Content management system | IPS Panel technology Multi-Media connectivity | Built-in speakers | Lightweight design | LED Backlight Pro-Cap touch interactive technology(Optional) | Optional operating system Tempered glass protection | Double sided screens | Integrated castors



Double Side Floor Standing Kiosk Type A - No.522DA

	Display Size (inch)	43	49	55	65				
	Resolution	1920*1080	1920*1080	1920*1080	3840*2160				
	Active Display Area HxV (mm)	941.2*532.4	1070*601	1209.6*680.4	1428.48*803.52				
	Aspect Ratio	16:09							
	Brightness (cd/m2)		350 & 1000 nits						
Panel	Display Mode		Normally Black, IP	S OPENCELL					
Pai	Contrast Ratio (Type)	1000:1	1000:1	500	00:1				
	Viewing Angle (Deg)		178/178 Wide						
	Colour		16.7	M					
	Response Time	6 ms							
	Display Colours	10bit Dithering - 10.07 Billion							
	Life Time		60,000	Hrs					
	Туре		Inter	nal					
Power	Power Supply		AC 100 ~ 240\	/, 50/60 Hz					
Po	Sleep Mode		Less than	n 0.5W					
	Off Mode		Less than	0.5W					
עט	Color		Golden Frame an	d White Body					
Appearance	Surface Treatment		Powder 0	Coated					
eara	Shell Material		Cold rolled Alumin	ium Sheet Body					
dd\	Installation		Floor Sta	anding					
~	Screen Position		Portraint (Default)						
	Working Temp.		0 - 40 degree						
	Storage Temp.		-15 - 50 degree						
	Working Humidity		20 - 80 pe	ercent					
Others	Storage Humidity	10 - 90 percent							
Oth	Loud Speaker		Yes, 8 Ohm/ 5	watt *2 pcs					
	IP Code		IP2	0					
	Unit Package	P	E film + foam corner protecto	r + Carton or Honeycomb B	ox				
	Power Consumption		24W						
Š.	Accessories	Remo	ote Control(only for Plug & Play and Android), Power Cable						
ccess.	User Manual		Ye	S					
¥	Warranty Card		Yes						
	Plug & Play		Android						
	1. Support multi-types formats for	video, image, sounds.	Processor: Rockchip® RK3368 (1.5ghZ, octa core)						
	2. Build-in SD card socket, support medium.	extended storage	RAM: 2 GB DDR Storage: 8 GB Flash						
System	3. Timing function, energy saving a pollution.	and reduce noise& visual	Connection: Ethernet (RJ45), WiFi, Bluetooth, 3G&4G (optional)						
Ś	4. Scheduling and management by	remote control.	OS Version: Android 7.1						
	5. Easy&fast to update via USB disk	, various update mode.	WiFi: 802.11b/g/n						
	I/O: USBx1, HDMIx1, SD card plugx	1	I/O: USB2.0*2, RJ-45*1, SD socket*1, HDMI*1,DC*1, Audio*1						
	OS Language: English (Default) - N	Nulti-language	OS Language: English (Default) - Multi-language						
PC Option available upon request.									
Touch	Version also available								



Suitable for the toughest of outdoor conditions - designed with a full-bodied, weathering protected, outer casing to give protection from both the elements and the public. The outer casing has an IP65 rating which means it keeps out all airborne dust and other particles as well as being protected from any wet weather conditions; broadening the range of possible environments. Designed for the challenge of direct sunlight, these displays use commercial grade ultra-high brightness panels (2,500cd/m2); up to 10 times brighter than a domestic television. The display has a light sensor that changes the screen's brightness depending on the ambient light ensuring the most suitable brightness at any time of the day.




Pixel Pitch	Density (dot/m2)	LED Type	Module Size (mm)	Pixel Configuration	Driving Method	Brightness (cd/m2)	Cabinet Material	Standard Cabinet Size(mm)	Cabinet Weight per sqm
Р3	111111	SMD1919	192*192	1R1G1B	1/16 scan	6500	Steel	Customized	40kg
P3.91	65,536	SMD1919	250*250	1R1G1B	1/8 scan	6500	Steel	Customized	40kg
P4	62500	SMD2919	256*128	1R1G1B	1/4 scan	6500	Steel	Customized	40kg
P4	02300	SMD2919	320*160	1R1G1B	1/4 scan	6500	Steel	Customized	40kg
P4.81	43,264	SMD1919	250*250	1R1G1B	1/8 scan	6500	Steel	Customized	40kg
P5	40000	SMD2525	320*160	1R1G1B	1/8scan	6500	Steel	Customized	40kg
P6	27,777	SMD3535	192*192	1R1G1B	1/8 scan	6500	Steel	Customized	40kg
			320*160	1R1G1B		6500	Steel	Customized	40kg
P6.67	22,500	SMD3535	320*160	1R1G1B	1/6scan	6500	Steel	Customized	40kg
P8	15,625	,625 SMD3535	256*128	1R1G1B	1/4 scan	6500	Steel	Customized	40kg
10			320*160	1R1G1B	1/4 scan	6500	Steel	Customized	40kg
P10	10,000	SMD3535	320*160	1R1G1B	1/4 scan	6500	Steel	Customized	40kg

Accessiories:

- 1.Receiving card, Sending card (S2) with HDMI or VGA interface, Video processor, Colorlight C4,C6,C8 with Wifi,USB If need 4G elite.
- 2. The sending box with USB is according to resolution of whole screen.
- 3. All above accessiories are priced based on required display size.





Indoor LED Screen is available in various sizes to meet your signage needs. Get the most out of from the passing by track and enchant show attendees using a screen. It is the perfect marketing solution to display new products, videos, information and more.



Pixel Pitch	Density (dot/m2)	LED Type	Module Size (mm)	Pixel Configuration	Driving Method	Brightness (cd/m2)	Cabinet Material	Standard Cabinet Size	Cabinet Weight per sqm	
P2	2,50,000	SMD1515	256*128	1R1G1B	1/32 scan	1000	Steel	Customized	20kg	
P2.5	1,60,000	SMD2121	160*160	1R1G1B	1/32 scan	1200	Steel	Customized	20kg	
P2.976	1,12,896	SMD2121	250*250	1R1G1B	1/28 scan	1200	Steel	Customized	20kg	
P3	1,11,111	SMD2121	192*192	1R1G1B	1/32 scan	1200	Steel	Customized	20kg	
	,,,,,,,,		320*160	1R1G1B		1200	Steel	Customized	20kg	
P3.91	65,536	SMD2121	250*250	1R1G1B	1/16 scan	1200	Steel	Customized	20kg	
P4	62500	SMD2121	256*128	1R1G1B	1/4 scan	1200	Steel	Customized	20kg	
			320*160	1R1G1B	1/4 scan	1200	Steel	Customized	20kg	
P4.81	43,264	SMD2121	250*250	1R1G1B	1/13 scan	1200	Steel	Customized	20kg	
P5	40000	SMD3528	320*160	1R1G1B	1/16 scan	1200	Steel	Customized	20kg	
D4	27 777	7 SMD3528		192*192	1R1G1B	4/4/	1200	Steel	Customized	20kg
P6	27,777		320*160	1R1G1B	1/16 scan	1200	Steel	Customized	20kg	
P7.62	17,222	SMD3528	244*122	1R1G1B	1/16 scan	1200	Steel	Customized	20kg	
P10	10,000	SMD3528	320*160	1R1G1B	1/4 scan	1200	Steel	Customized	20kg	

Accessiories:

- 1.Receiving card, Sending card (S2) with HDMI or VGA interface, Video processor, Colorlight C4,C6,C8 with Wifi,USB If need 4G elite.
- 2. The sending box with USB is according to resolution of whole screen.
- 3. All above accessiories are priced based on required display size.



+91 96863 43647 , +91 98455 59076 | info@vrvinfoled.com | www.vrvinfoled.com 4th Floor, PVS Building, MG Road, Mangalore 1st Floor, 2nd Stage, J.C Indsl Estate, Yelchanahalli, Bangalore